


Interior task lighting

IP 44

Accommodation

GSB

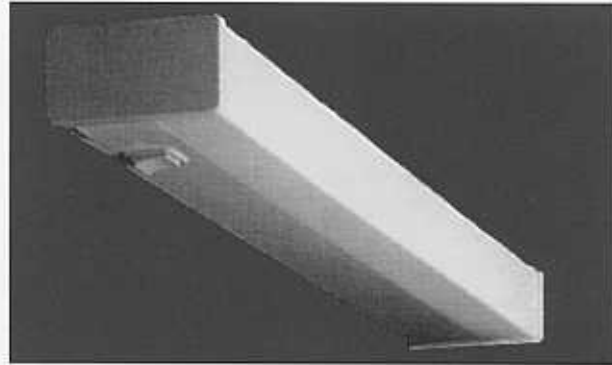

GSB

Technical Specification

Applications: Bathrooms, mirror, desk, bed-head.

Execution: According to rules of relevant classification societies, UL595 and CSA approved.

Materials: Main body of galvanized steel plate with spring loaded endcaps and stove enamelled white epoxy powder finish. Luminaires, are available with on/off switch (S), receptacle (U), and isolation transformer (I).

Diffuser: 3mm Opal acrylic diffuser.

Mounting: Direct to ceiling or wall.

Cable Entry: One grommet, diameter 20.5 mm/0.81 in, at the back, and one knockout, diameter 19mm/0.75 in, on the side.

Wiring: Available with low (L) power factor ballast. Flexible heat resistant wiring.

Voltage and Frequency: 120V/60HZ (others on request)

Optional Equipment:

- 1) On-off switch (S).
- 2) Single receptacle (U).
- 3) Isolating transformer (I).

*Subject to technical modifications without notification. Consult factory for verification.

Types and Dimensions

Type	Lamps/ Watts	L1 (mm/in)	C (mm/in)	W (mm/in)	H (mm/in)	Weight (kg/lbs)
GSB 115	1/15	486/19.13	307/12.09	58/2.28	107/4.21	1.8/3.96
GSB S 115	1/15	486/19.13	307/12.09	58/2.28	107/4.21	2.5/5.50
GSB SU 115	1/15	486/19.13	307/12.09	58/2.28	107/4.21	2.6/5.72
GSB SUI 115	1/15	486/19.13	307/12.09	58/2.28	107/4.21	2.7/5.94
GSB 120	1/20	637/25.03	521/20.47	58/2.28	107/4.21	2.5/5.5
GSB S 120	1/20	637/25.03	521/20.47	58/2.28	107/4.21	2.6/5.72
GSB SU 120	1/20	637/25.03	521/20.47	58/2.28	107/4.21	3.1/6.82
GSB SUI 120	1/20	637/25.03	521/20.47	58/2.28	107/4.21	3.4/7.48
GSB 140	1/40	1247/49.00	1131/44.44	58/2.28	107/4.21	4.2/9.24
GSB 140/30 BX	1/30 BX	637/25.03	521/20.47	58/2.28	107/4.21	2.5/5.5
GSB S 140/30 BX	1/30 BX	637/25.03	521/20.47	58/2.28	107/4.21	2.6/5.72
GSB SU 140/30 BX	1/30 BX	637/25.03	521/20.47	58/2.28	107/4.21	3.1/6.82
GSB SUI 140/30 BX	1/30 BX	637/25.03	521/20.47	58/2.28	107/4.21	3.4/7.48